

13-14GHz Low Noise Amplifier

General Description

The NLC00412 is a single biased (+15 V) low noise amplifier that operates between 13.0 GHz and 14.0 GHz. A thin film hybrid MIC process is used to achieve robust characteristics over temperature range -30°C to +70°C. The amplifier incorporates internally protected voltage regulator, reverse polarity protection and can be biased in a wide range of DC voltage.



Both input and output RF connectors are field replaceable SMA-F connector.

Performance 25 °C, Vcc = +15V


Parameter	Min.	Typ.	Max.	Units
Frequency	13.0		14.0	GHz
Gain at room temperature	16	17		dB
Gain Flatness over all frequency range at room temperature			± 1.0	dB
Noise Figure at room temperature		2.5	3.0	dB
1 dB Compression Point at room temperature	12	13		dBm
Input VSWR			2.0 : 1	
Output VSWR			2.0 : 1	
DC supply voltage (Vcc)	+10	+15	+17	V
Supplied Current		50	80	mA
Operating Temperature	-30		70	°C

Customized Designs: For custom designs, including both electrical and mechanical, please contact us at sales@nextec-rf.com.


13-14GHz Low Noise Amplifier

Typical Test Data

Gain and Return Losses at 25 °C

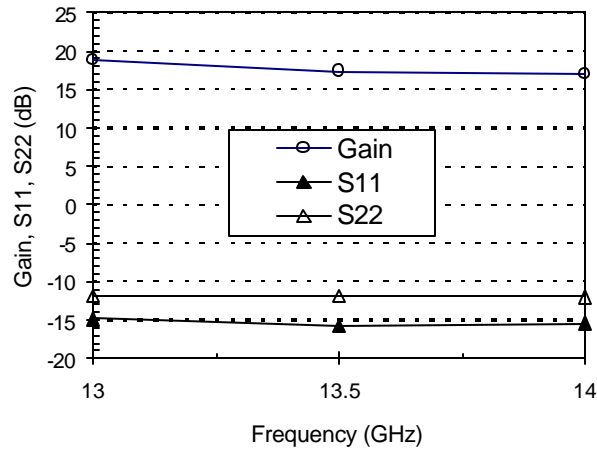


P1-dB, Output IP3 and Noise Figure at 25 degC

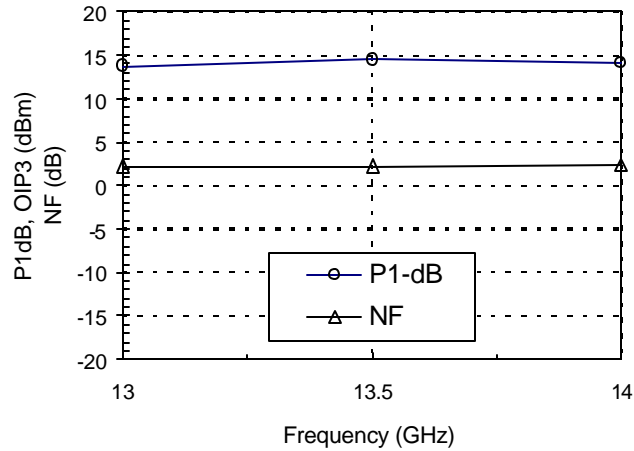

Customized Designs: For custom designs, including both electrical and mechanical, please contact us at sales@nextec-rf.com.

13-14GHz Low Noise Amplifier

Outline Drawing

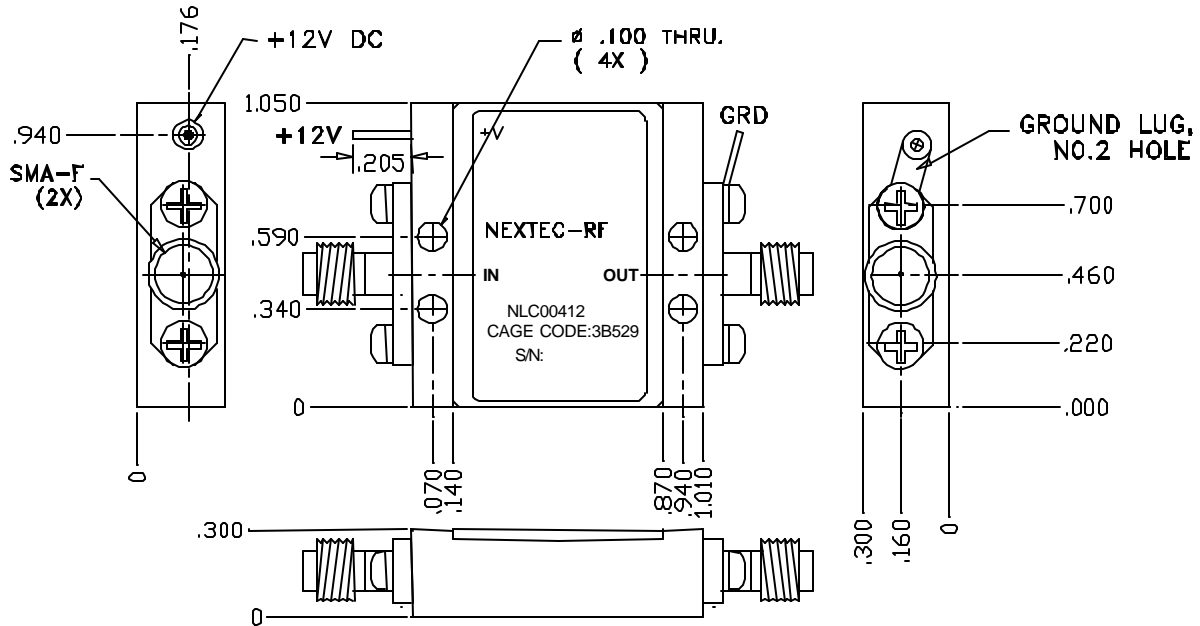

(unit: inch)

Connector Description

RFin	RF input signal (replaceable SMA-F)
RFout	RF output signal (replaceable SMA-F)
Vcc	DC Supply Voltage (10V to 17 V)

Customized Designs: For custom designs, including both electrical and mechanical, please contact us at sales@nextec-rf.com.